



配电箱分类

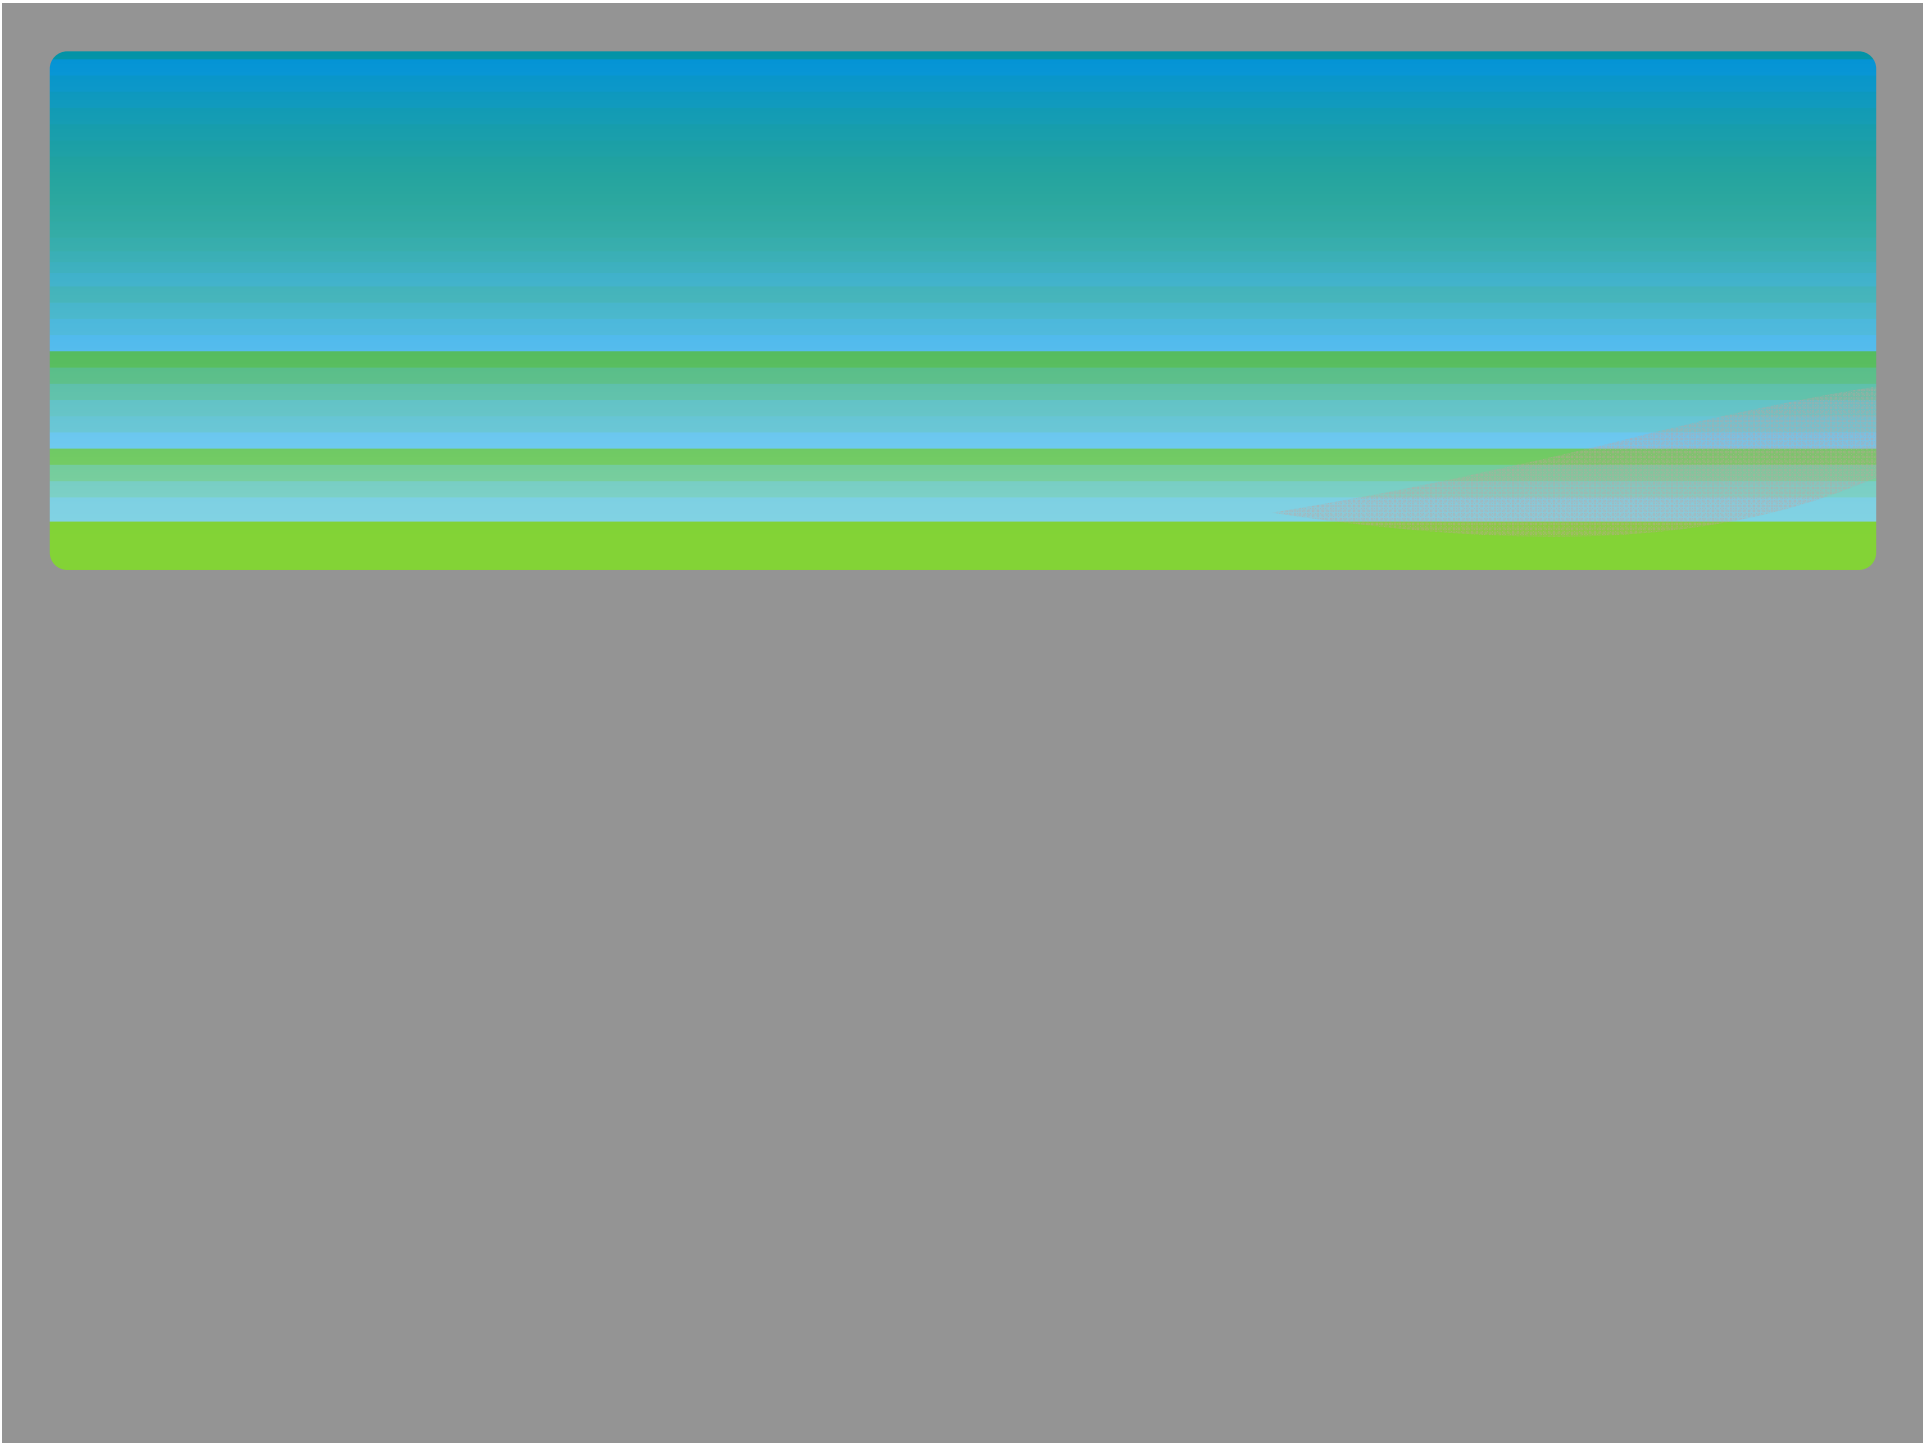

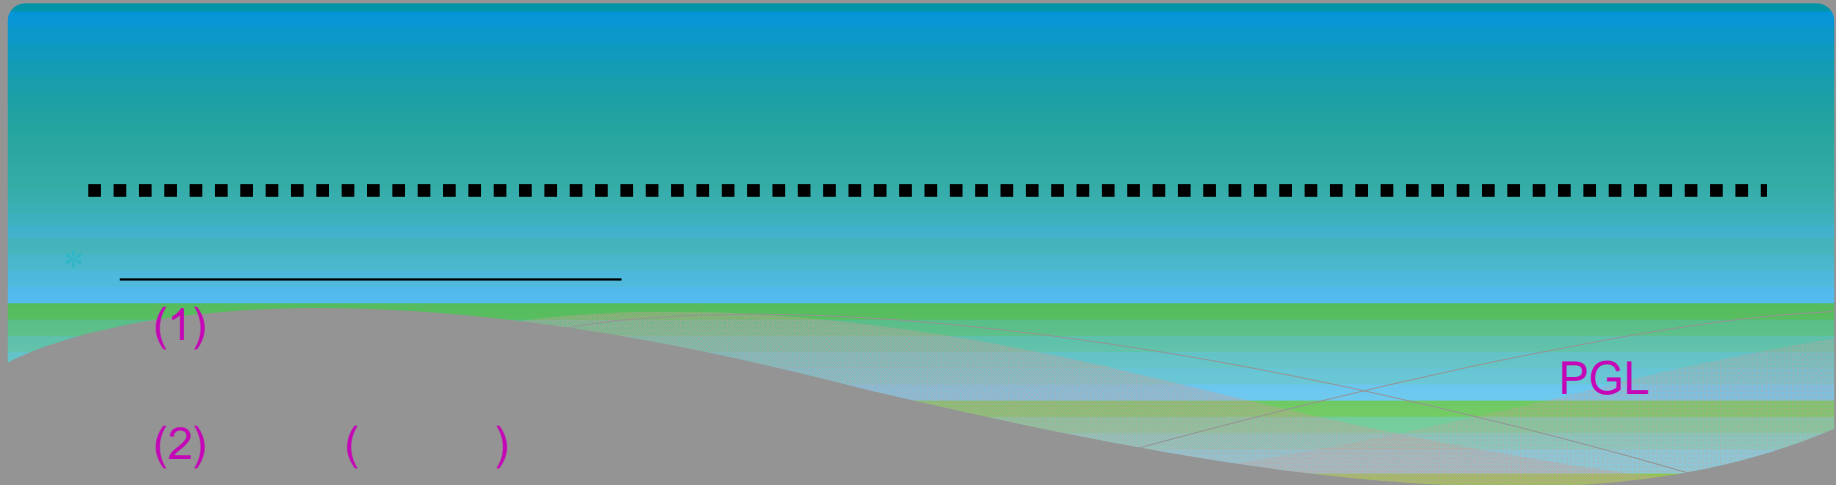

(1)

(2) ()

()

(3)


GGD

PGL

GCS MNS 8PT

(4)

GCK

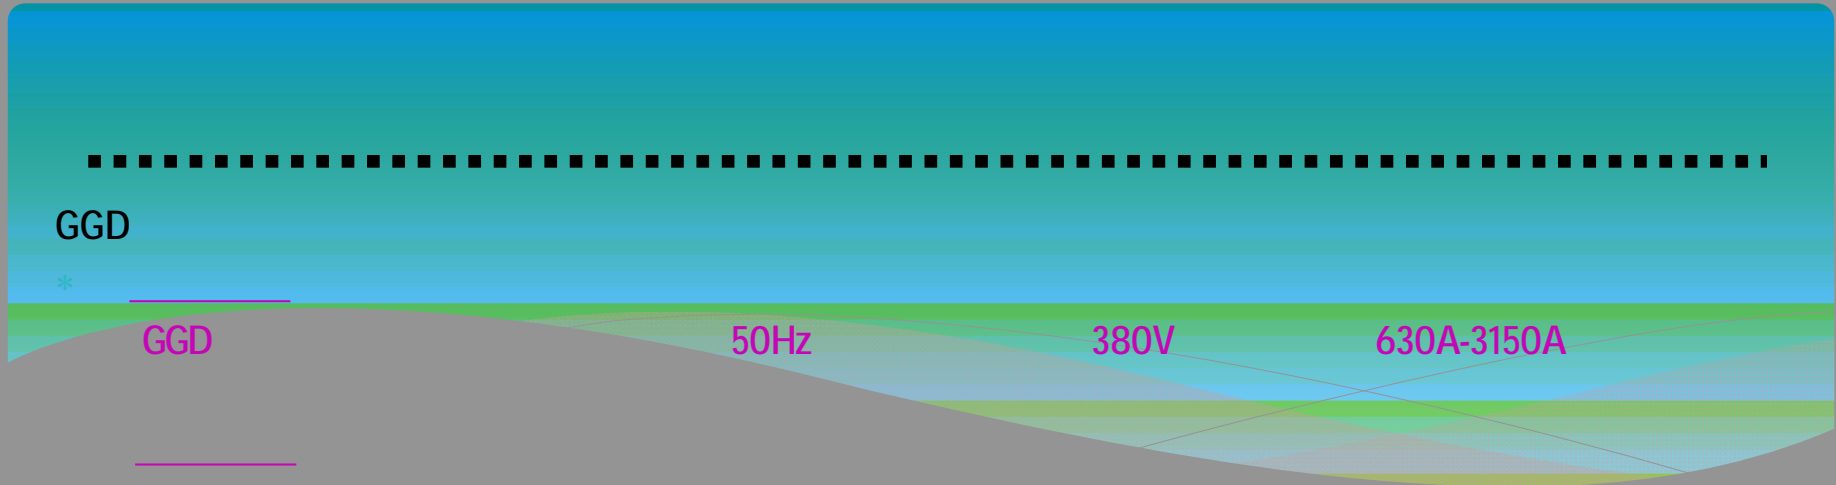

GGD

*

GGD

50Hz

380V

630A-3150A

GGD

8MF

20

GGD

IP30

IP20

IP40

G

G

D

GGD


GGD1 15KA, 630A GGD2 30KA, 1600A
GGD3 50KA, 3150A

600/800/1000/1200*600/800/1000*2200 800 800



8MF
2mm



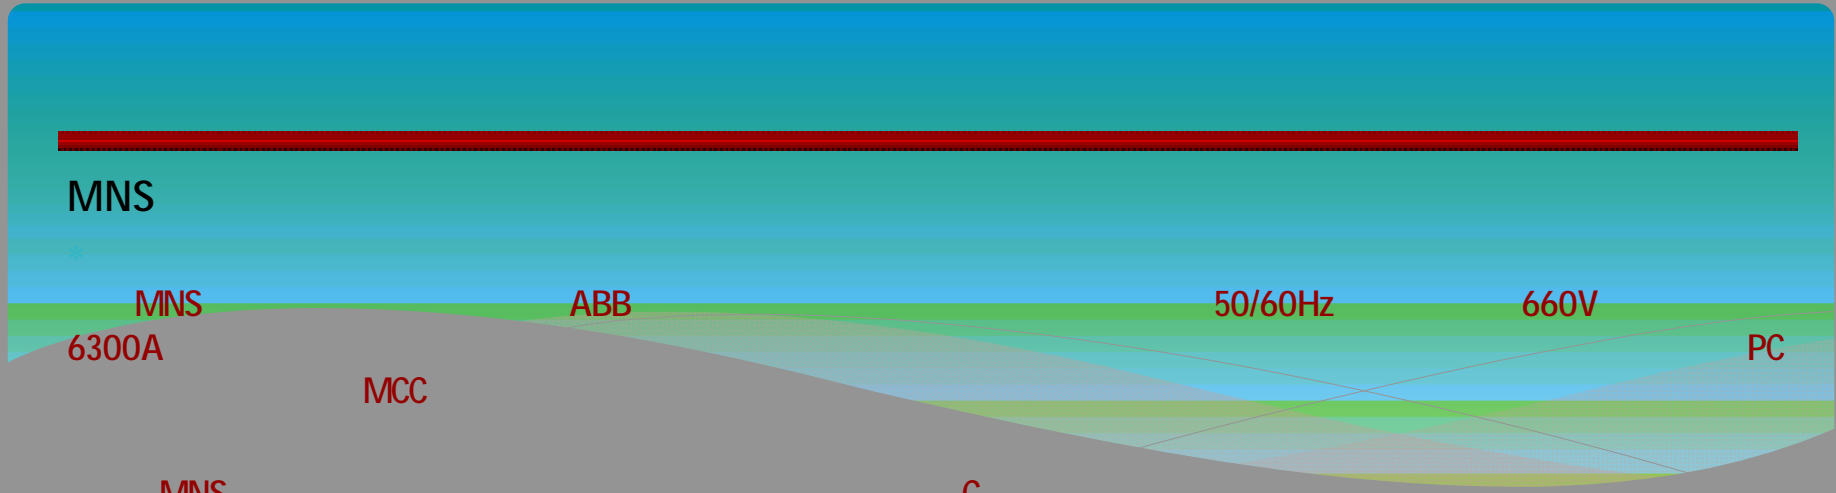

MNS

8.8

C

E=25mm


MNS

E=25mm

MNS

4

IP30~IP54



MNS

: 2200 * 1000 * 600 / 800 / 1000 / 1200

* *

600

800


44*44

72*72

ABB



电缆和控制线在开关柜中的接线方式

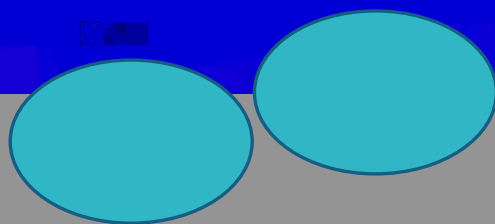

MNS

■ MCC

8E/4 8E/2 8E 16E 24E

1E=25mm


16-32

■


6300A



2000A

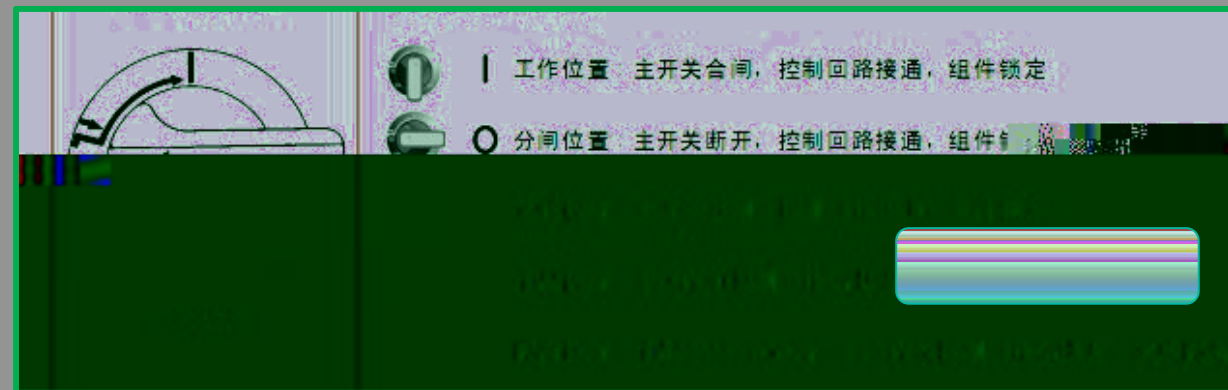


630A

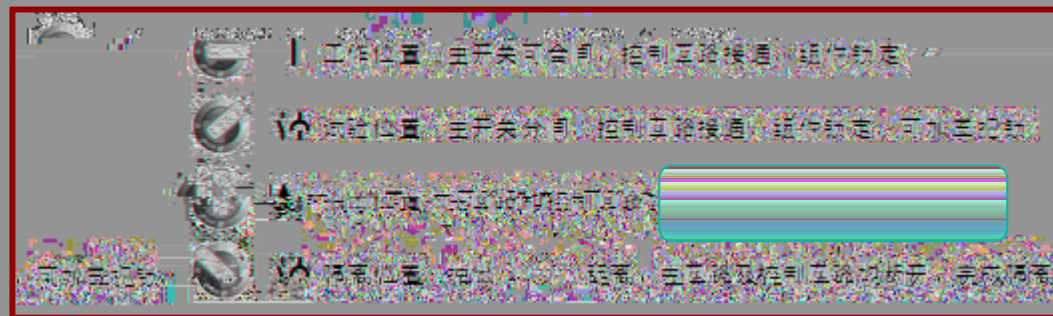

2500A

MNS2.0

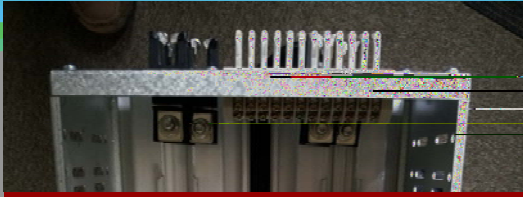


MNS



GCK GCS

GCK

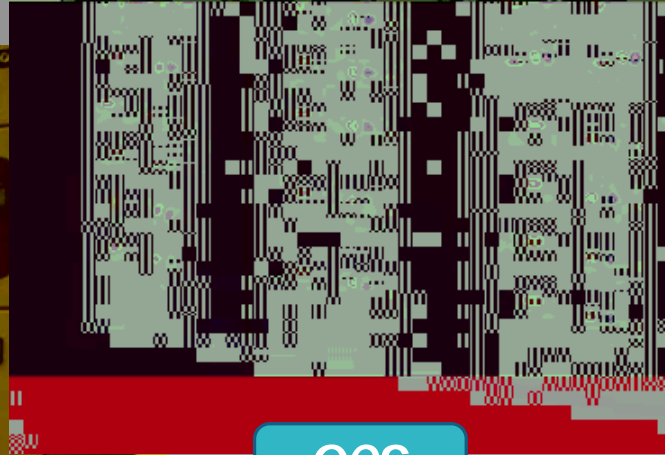


GCS



GCK GCS MNS

操作柜	型号	模数	母线	抽屉	最小	原产地	层数	拼装	数
单面	GCK	1单元	水平母线设在柜顶垂直 母线设有阻燃型塑料 功能板	1抽 屉	国内自 主开发	最多9 层			最多9 抽屉
单面	GCS	1/2 单元	水平母线后出线垂直 母线设有阻燃型塑料 功能板	1/2 抽屉	国内自 主开发	最多 11层	8MF 型钢		最多22 抽屉
双面	MNS	1/4 单元	水平母线后出线垂直 母线设有阻燃型塑料 功能板	1/4 抽屉	ABB引 进	最多9 层	C型 钢		最多72 抽屉



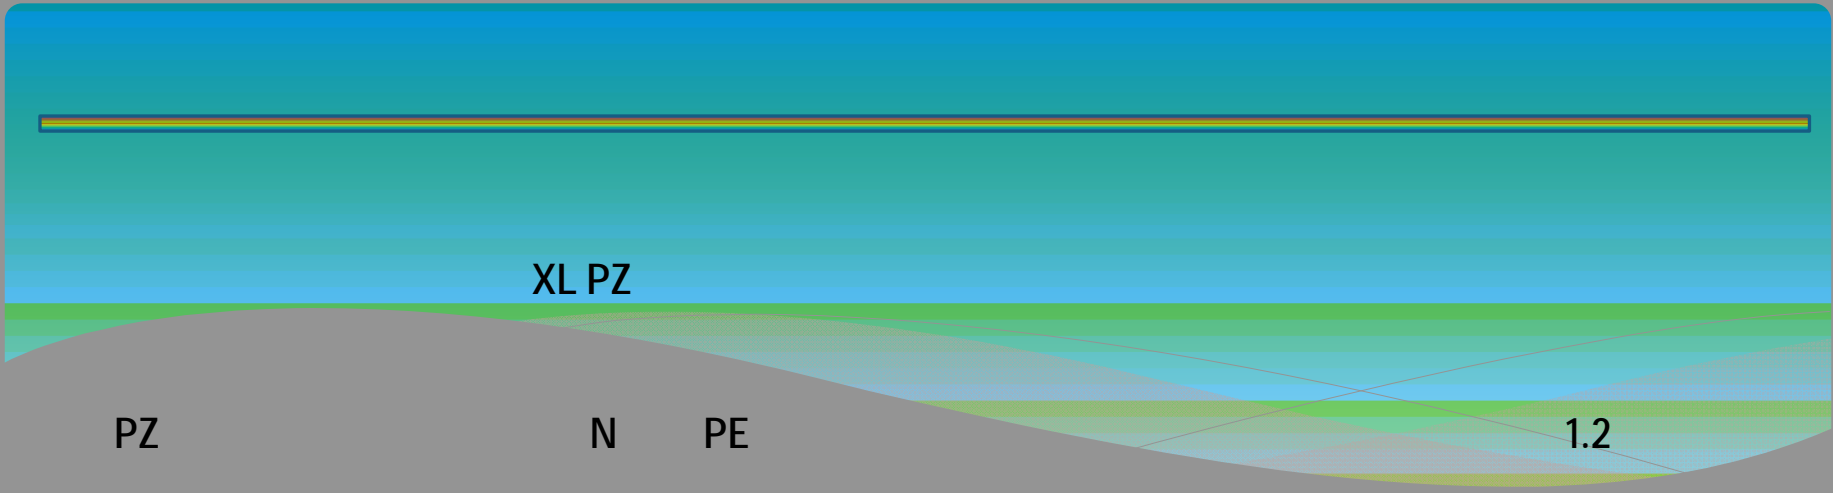

PZ

XL PZ

N

PE

1.2

250A,

6KA.

HD12BX

6L2(72*72)

N

PE

630A,

10KA

1.5







PZ30



XL-21

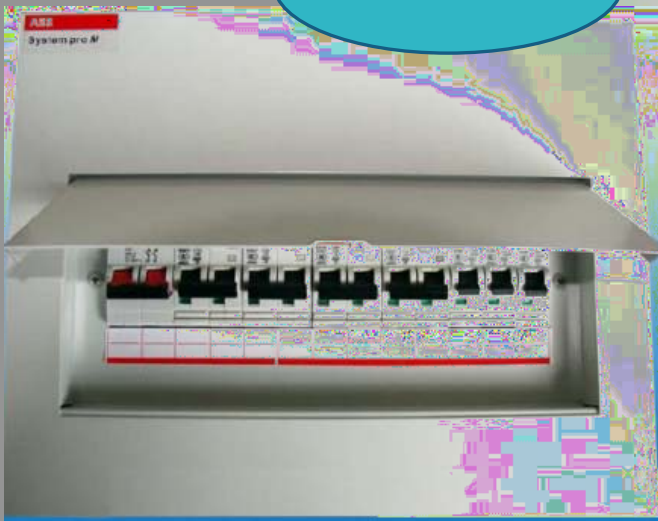

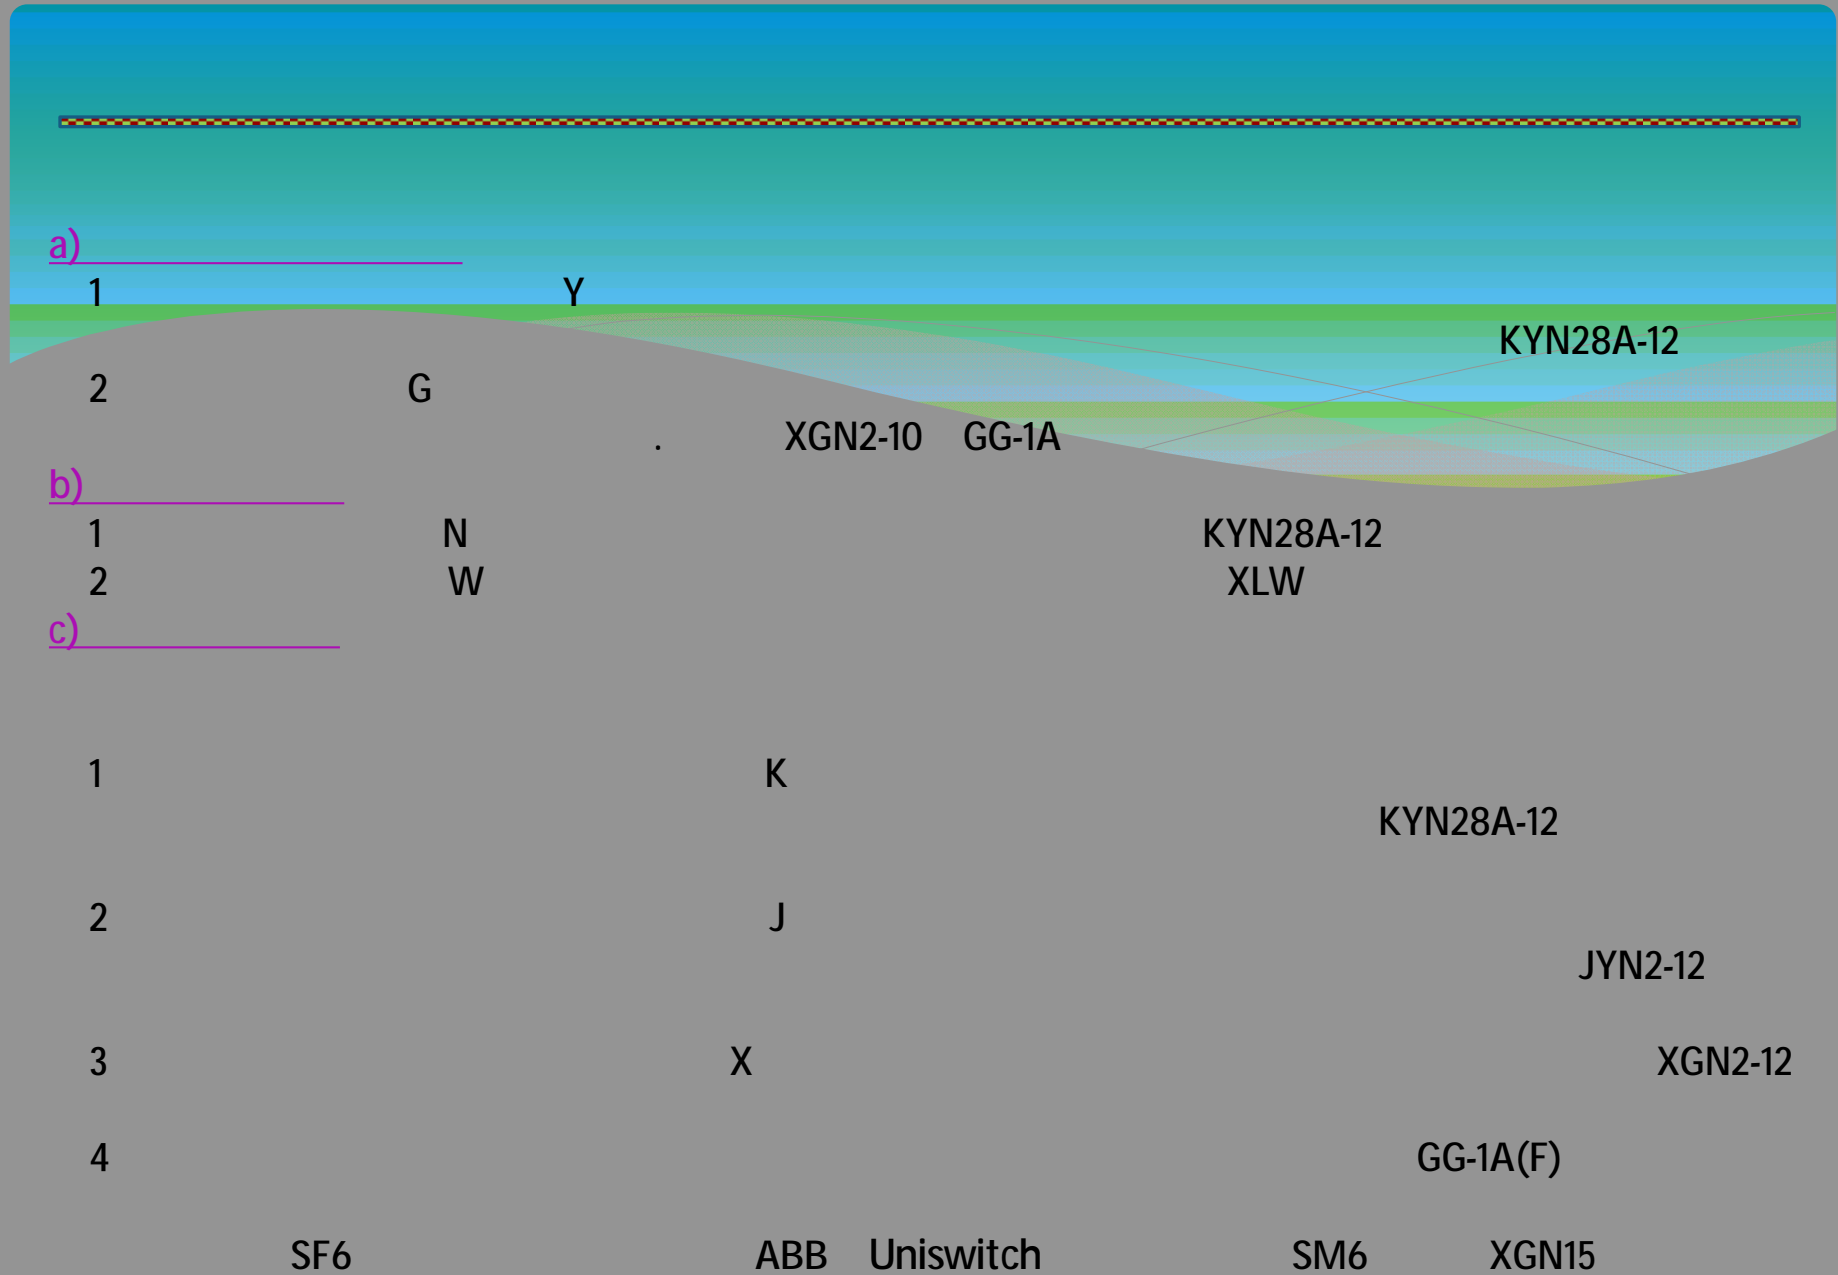

KYN28-12

KYN28-12(GZS1-12)

3 10KV


50Hz

ABB

VD4

VS1

KYN28-12

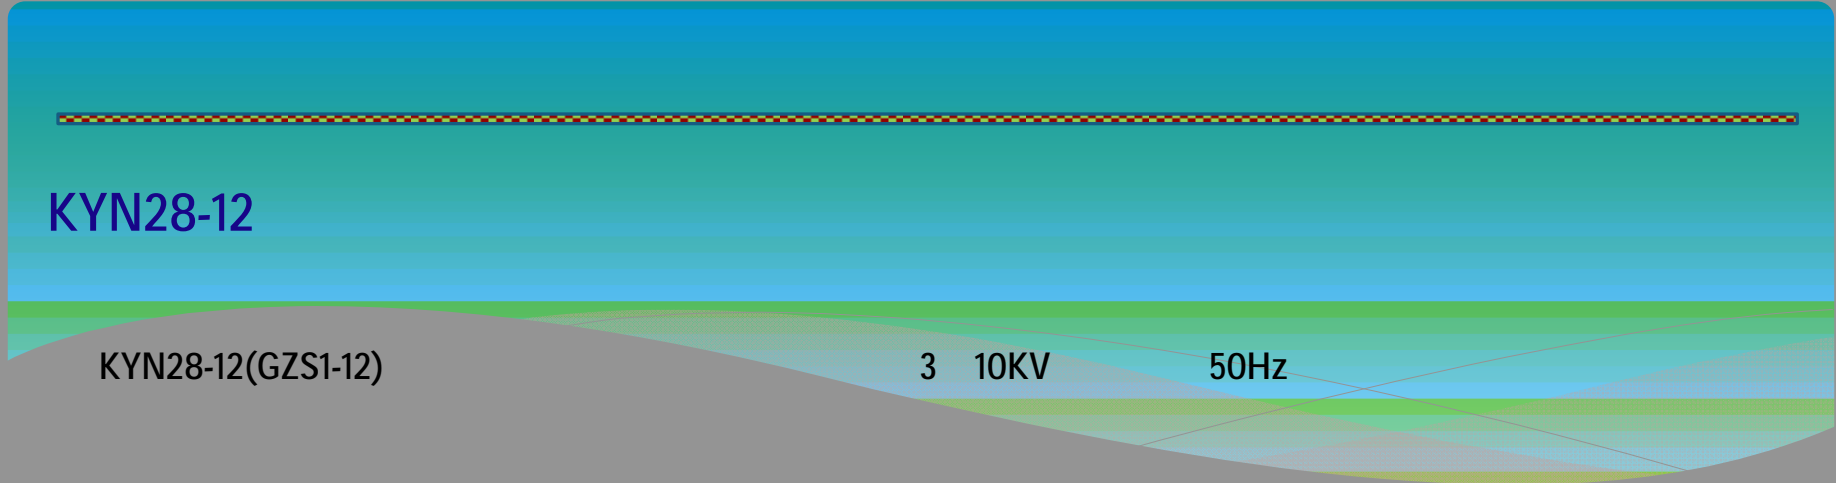




KYN28



GG1A

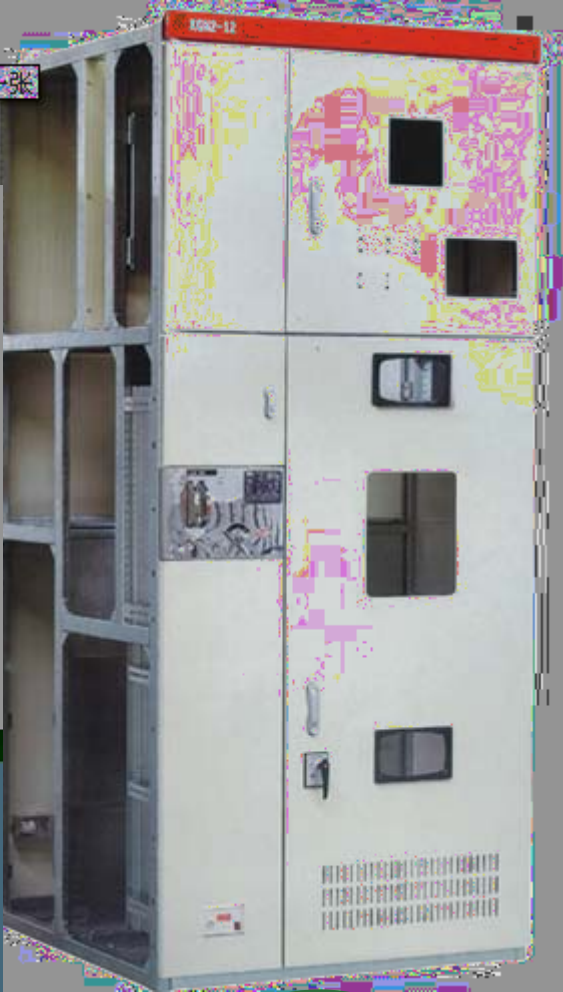

XGN2



ABB-Uniswitch
SF6



XGN15
SF6



SM6 SF6

JYN2