


RCCN 日成SRT型硅橡胶耐高温套管 Silicone Rubber Tubing



材质 采用优质耐高温硅橡胶原料制成
 特性 柔软、阻燃、无毒、耐电弧、耐电晕柔弹性好，耐扭结不变形
 温度 至 ；
 颜色 红色、蓝色、白色、灰色、绿色、透明色
 用途 各类电器 灯具 电子仪器绝缘保护 特适于耐高温绝缘 易适合食品安全相关连接。
 备注 同型号有多种厚度 请订购时型号后加入需求厚度 如
 说明 型号带 为特殊品，交期较久。
 默认颜色为透明，其它颜色有起订量要求。

订购型号例:SRT-0.8/1.5

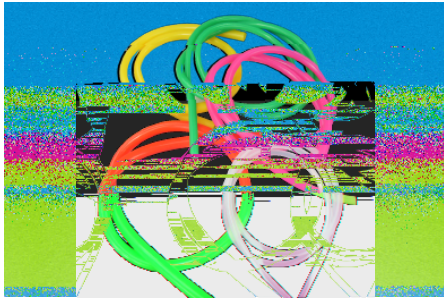

单位/Unit:mm

型号	公称内径	内径	型号配套选型电压 V 及壁厚 W				包装
			2500V	4000V	6000V	7000V	
SRT-0.8		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-1		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-1.5		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-2		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-2.5		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-3		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-3.5		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-4		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-4.5		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-5		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-5.5		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-6		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-6.5		±	± 0.1	± 0.15	± 0.20	± 0.25	
SRT-7		±		± 0.15	± 0.20	± 0.25	
SRT-7.5		±		± 0.15	± 0.20	± 0.25	
SRT-8		±		± 0.15	± 0.20	± 0.25	
SRT-9		±		± 0.15	± 0.20	± 0.25	
SRT-10		±		± 0.15	± 0.20	± 0.25	
SRT-11		±		± 0.15	± 0.20	± 0.25	
SRT-12		±		± 0.15	± 0.20	± 0.25	
SRT-13		±		± 0.15	± 0.20	± 0.25	
SRT-14		±			± 0.20	± 0.25	
SRT-15		±			± 0.20	± 0.25	
SRT-20		± 0.3			± 0.20	± 0.30	
SRT-22		± 0.3				± 0.30	
SRT-25		± 0.3				± 0.30	
SRT-30		± 0.3				± 0.30	
SRT-32		± 0.3			± 0.20	± 0.30	
SRT-38		± 0.3				± 0.30	

可定制硅胶产品 如图参考

