

NR2 系列热继电器




1

NR2 () 50Hz/60Hz 690V
(0.1-630)A

GB/T 14048.4 GB/T 14048.5 IEC 60947-4-1


2

2.1 2000m
2.2 -5 ~ +40 24h +35
2.3 +40 50%
+25 90%
2.4 3
2.5 5°
2.6
2.7
2.8 0.25-0.25
-0.16 1.6



项目	NR2-11.5	NR2-25	NR2-36	NR2-93	NR2-150	NR2-200	NR2-630
	13	25	36	93	150	200	630
V	690	690	690	690	690	690	690
V	6000	6000	6000	6000	6000	6000	6000
	Ip20	Ip20	Ip20	Ip20	-	-	-

		1NO+1NC	1NO+1NC	1NO+1NC	1NO+1NC	1NO+1NC	1NO+1NC	1NO+1NC
AC-15 220V	A	2.73	2.73	2.73	2.73	2.73	2.73	2.73
AC-15 380V	A	1.58	1.58	1.58	1.58	1.58	1.58	1.58
DC-13 220V	A	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		1-4	1-4	4-10	4-35	25-50	25-95	70-2×240
		M3.5	M4	M4	M10	M6/M8	M8	M10
		1-2.5	1-2.5	1-2.5	1-2.5	1-2.5	1-2.5	1-2.5
mm ²		M3.5	M3.5	M3.5	M3.5	M3.5	M3.5	M3.5



4.1
4.1.1
4.1.2
4.1.3

.1.3

4.1.3

4.1.3


4.1.3

1.3













项目	序号	整定电流倍数	动作时间	试验条件
	1	1.05	2	
	2	1.2	2	(1)
	3	1.5	2	
	4	7.2	2s Tp 10s	
	5	1.0	0.9	2
	6	1.15	0	2 (5)

4.3 ()




产品外观	额定电流 A	相匹配熔断器规格(推荐RT16) A		相匹配接触器型号
		aM	gG	
	0.1-0.16	0.25	2	
	0.16-0.25	0.5	2	
	0.25-0.4	1	2	
	0.4-0.63	1	2	
	0.63-1	2	4	
	1-1.6	2	4	
	1.25-2	4	6	
	1.6-2.5	4	6	
	2.5-4	6	10	
	4-6	8	16	
	5.5-8	12	20	
	7-10	12	20	
	9-13	16	25	
NR2-11.5				NC6-09
	0.1-0.16	0.25	2	
	0.16-0.25	0.5	2	
	0.25-0.4	1	2	
	0.4-0.63	1	2	
	0.63-1	2	4	
	1-1.6	2	4	
	1.25-2	4	6	
	1.6-2.5	4	6	
	2.5-4	6	10	
	4-6	8	16	
	5.5-8	12	20	
	7-10	12	20	
	9-13	16	25	
12-18	20	35		
17-25	25	50		
NR2-25				NC1/CJX2-09 NC1/CJX2-12 NC1/CJX2-18 NC1/CJX2-25 NC1/CJX2-32 NC7/NC100-09-18 NC7/NC100-25-32




产品外观	额定电流 A	相匹配熔断器规格(推荐RT16) A		相匹配 接触器型号
		aM	gG	
 NR2-36	23-32	40	63	NC7/NC100-32-38 NC1/CJX2-32 
	28-36	40	80	
 NR2-93	23-32	40	63	NC1/CJX2-40 NC1/CJX2-50 NC1/CJX2-65 NC1/CJX2-80 NC1/CJX2-95 NC7/NC100-40-65 NC7/NC100-80-95 
	30-40	40	100	
	37-50	63	100	
	48-65	63	100	
	55-70	80	125	
	63-80	80	125	
	80-93	100	160	
 NR2-150(NC2)	80-104	125	200	NC2-115 NC2-150 
	95-120	125	224	
	110-150	160	250	
 NR2-150(NC7)	80-104	125	200	NC7-115 NC7-150 NC7-170 
	95-120	125	224	
	110-150	160	250	
 NR2-200	80-125	125	200	NC2-115 NC2-150 NC2-185 NC2-225 NC7-115-170 NC7-205 
	100-160	160	250	
	125-200	200	315	
 NR2-630	160-250	250	400	NC2-185 NC2-225 NC2-265 NC2-330 NC2-400 NC2-500 NC2-630 NC7-205-300 NC7-410-475 NC7-620 
	200-315	315	500	
	250-400	400	630	
	315-475	500	800	
	475-630	630	800	


名称	用途
MB-1	NR2-11.5
MB-2	NR2-25
MB-3	NR2-36
MB-4	NR2-93

4.5

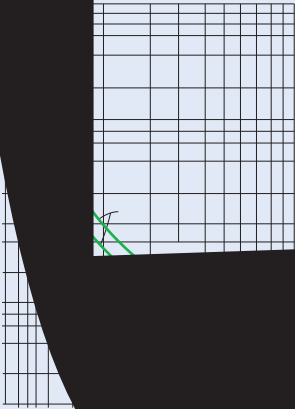

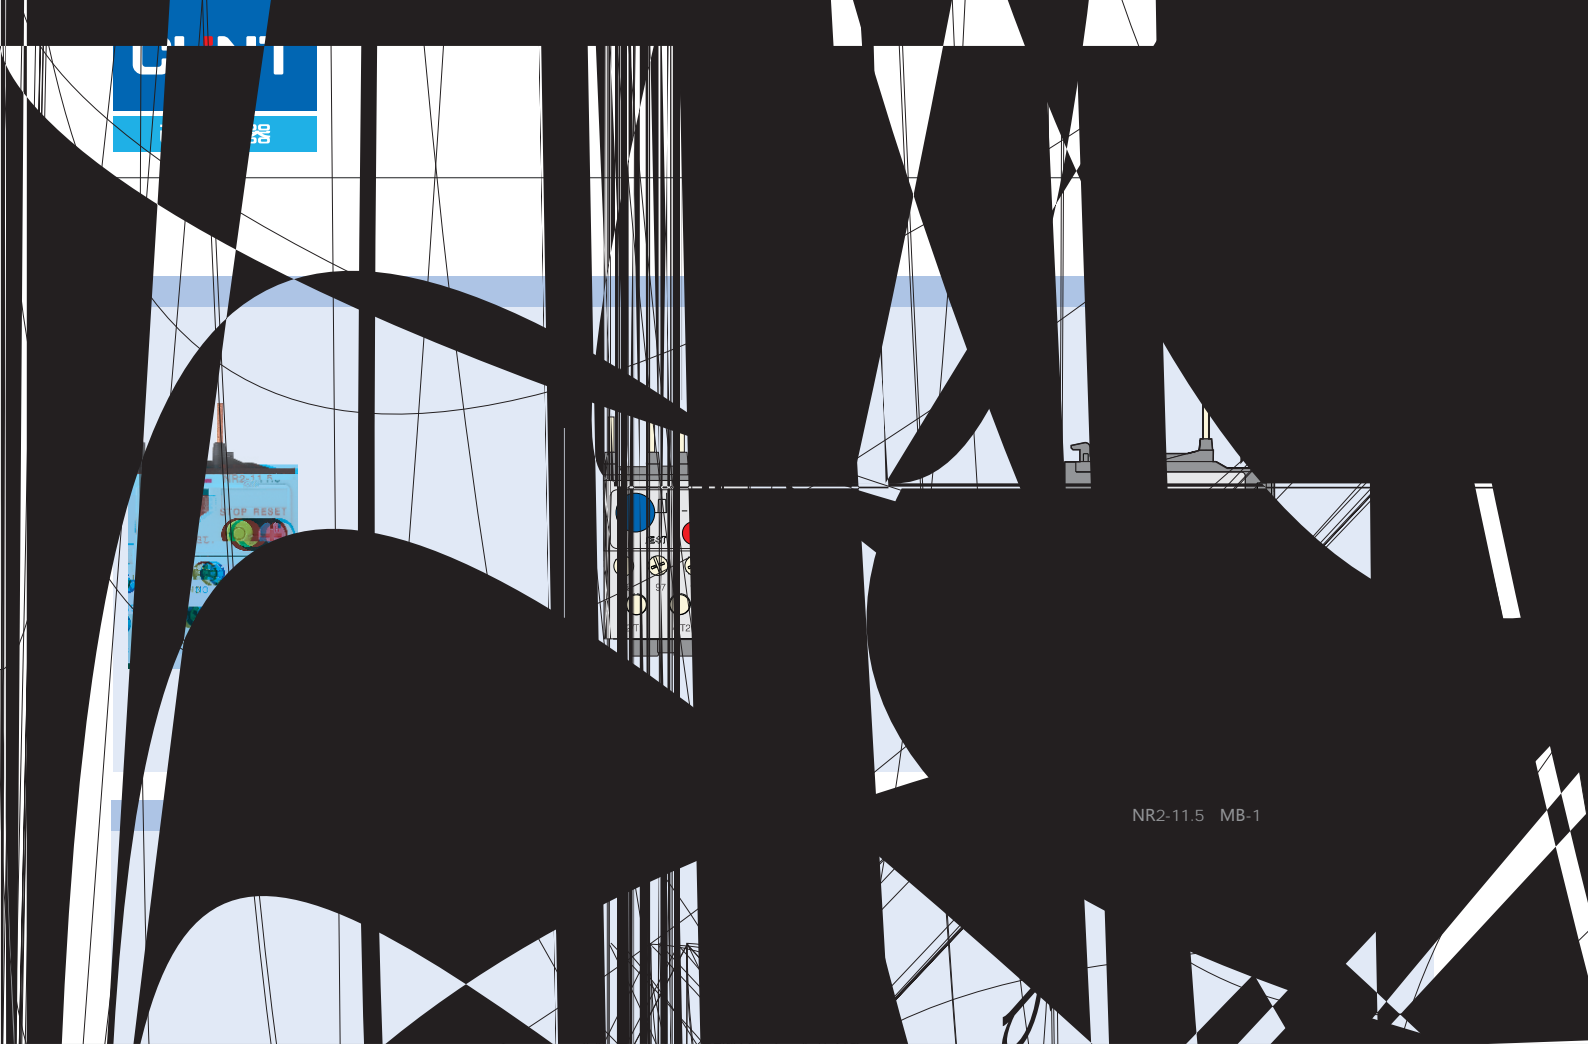


NR2-11.5 MB-1

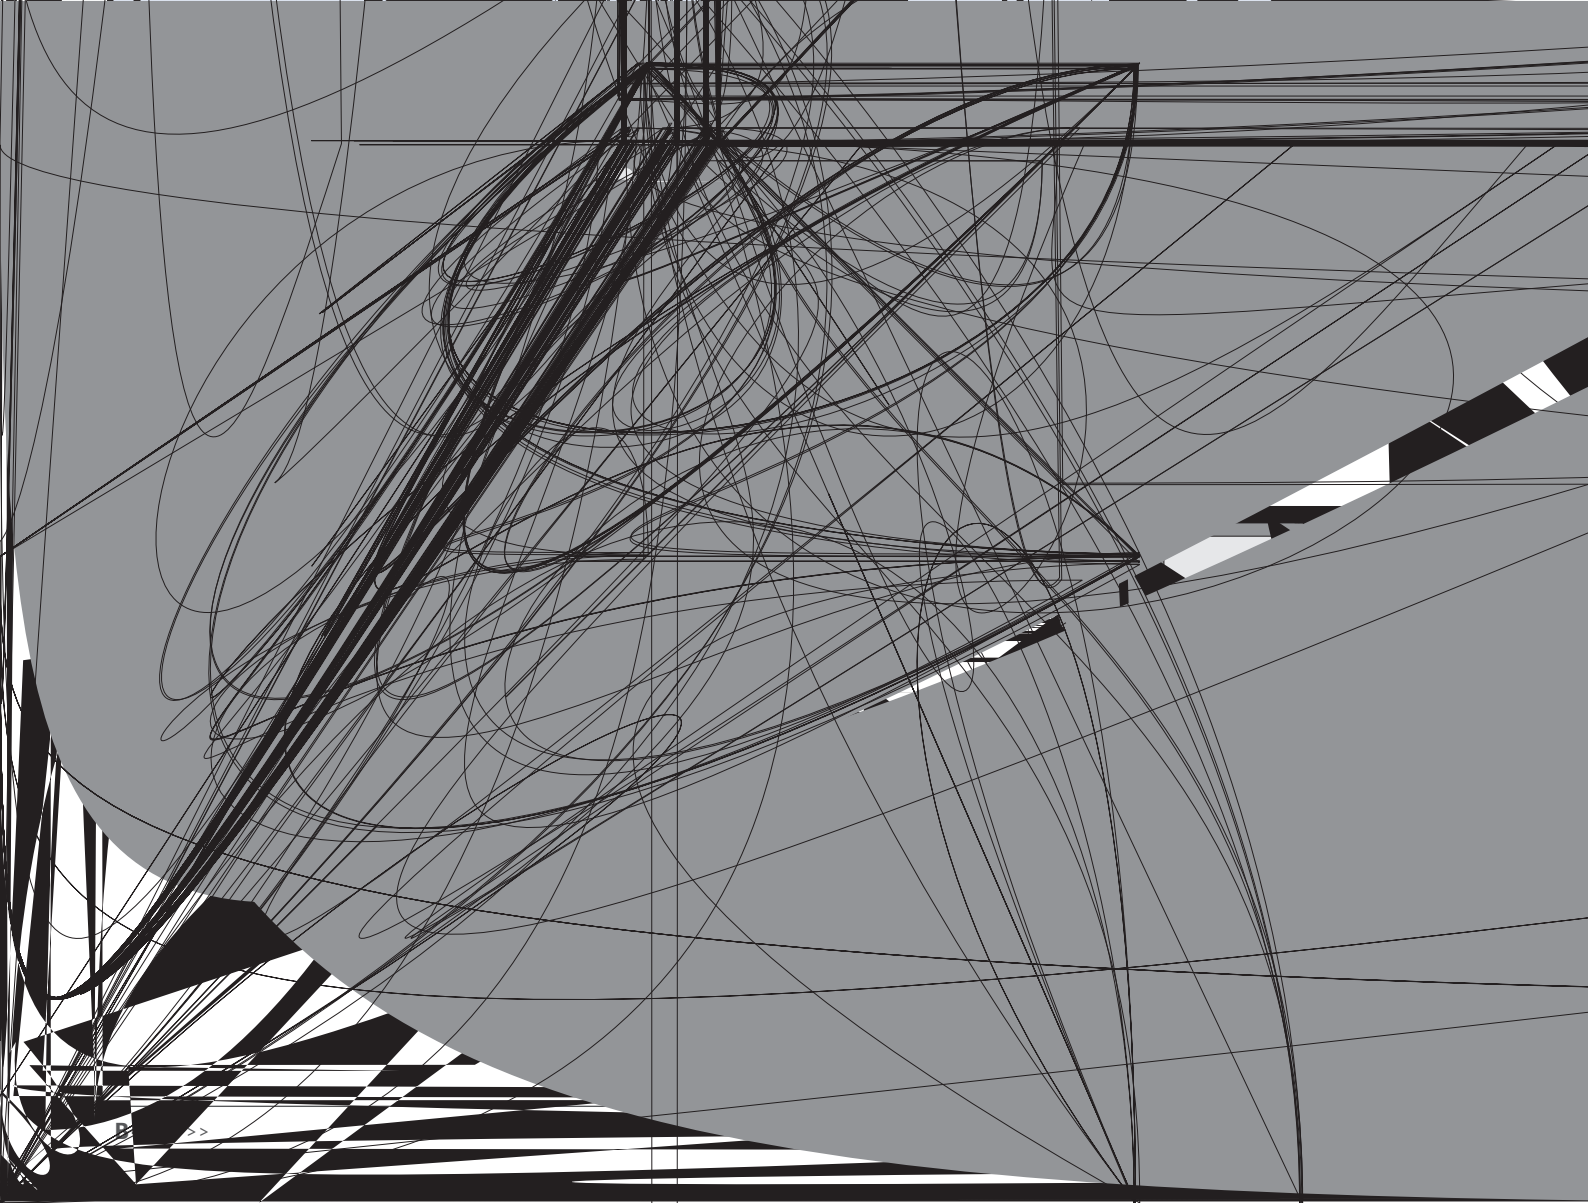



NR2-93外型及安装尺寸

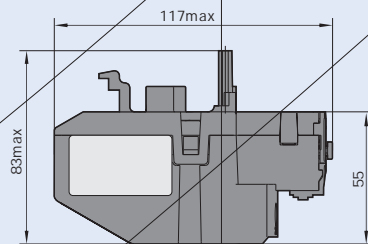

NR2-150(配NC2型)外型及安装尺寸

