













型号说明

NXR 系列热过载继电器

快速选型与配合表

| | A | RT16 A | |
|----------------------------------------------------------------------------------------------------|-----------|--------|----------------------------------------------------------------------------------------------------------------------------|
| | | gG | |
|  <p>NXR-12</p> | 0.1-0.16 | 2 |  <p>NXC-06M 09M 12M</p> |
| | 0.16-0.25 | 2 | |
| | 0.25-0.4 | 2 | |
| | 0.4-0.63 | 2 | |
| | 0.63-1 | 4 | |
| | 1-1.6 | 4 | |
| | 1.25-2 | 6 | |
| | 1.6-2.5 | 6 | |
| | 2.5-4 | 10 | |
| | 4-6 | 16 | |
| | 5.5-8 | 20 | |
| 7-10 | 20 | | |
| 9-12 | 25 | | |
|  <p>NXR-25</p> | 0.1-0.16 | 2 |  <p>NXC-06 09 12 16 18 22 25 32 38</p> |
| | 0.16-0.25 | 2 | |
| | 0.25-0.4 | 2 | |
| | 0.4-0.63 | 2 | |
| | 0.63-1 | 4 | |
| | 1-1.6 | 4 | |
| | 1.25-2 | 6 | |
| | 1.6-2.5 | 6 | |
| | 2.5-4 | 10 | |
| | 4-6 | 16 | |
| | 5.5-8 | 20 | |
| 7-10 | 20 | | |
| 9-13 | 25 | | |
| 12-18 | 35 | | |
| 17-25 | 50 | | |
|  <p>NXR-38</p> | 23-32 | 63 |  <p>NXC-25 32 38</p> |
| | 30-38 | 80 | |
|  <p>NXR-100</p> | 23-32 | 63 |  <p>NXC-40 50 65 75 85 100</p> |
| | 30-40 | 100 | |
| | 37-50 | 100 | |
| | 48-65 | 100 | |
| | 55-70 | 125 | |
| | 63-80 | 125 | |
| | 80-93 | 160 | |
| 80~100 | 160 | | |
|  <p>NXR-200</p> | 80-160 | 315 |  <p>NXC-120 160 185 225</p> |
| | 125-200 | 315 | |
|  <p>NXR-630</p> | 125-250 | 800 |  <p>NXC-225 265 330 400 500 630</p> |
| | 200-400 | 800 | |
| | 315-630 | 800 | |


主要参数及技术性能

| | | NXR-12 | NXR-25 | NXR-38 | NXR-100 | NXR-200 | NXR-630 |
|-------------------|--|---------|---------|---------|---------|---------|----------|
| V | | 12 | 25 | 38 | 100 | 200 | 630 |
| V | | 690 | 690 | 690 | 690 | 690 | 690 |
| V | | 6000 | 6000 | 6000 | 6000 | 6000 | 6000 |
| | | IP20 | IP20 | IP20 | IP20 | IP00 | IP00 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| AC-15 380V/400V A | | 1NO+1NC | 1NO+1NC | 1NO+1NC | 1NO+1NC | 1NO+1NC | 1NO+1NC |
| DC-13 220V A | | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| | | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| | | 1-4 | 1-6 | 4-10 | 4-35 | 25-95 | 50-2×185 |
| | | M3.5 | M4 | M4 | M10 | M8 | M10 |
| | | N-m | 1.2 | 1.7 | 10 | 10 | 20 |
| | | 1-2.5 | 1-2.5 | 1-2.5 | 1-2.5 | 1-2.5 | 1-2.5 |
| | | M3.5 | M3.5 | M3.5 | M3.5 | M3.5 | M3.5 |
| | | N-m | 0.8 | 0.8 | 0.8 | 1.2 | 1.2 |

保护特性



| | | | | | |
|--|---|------|-----|-----------|---|
| | 1 | 1.05 | | 2 | |
| | 2 | 1.2 | | 2 | 1 |
| | 3 | 1.5 | | 2 | |
| | 4 | 7.2 | | 2s Tp 10s | |
| | 5 | | | 2 | |
| | | 1.0 | 0.9 | | |
| | 6 | 1.15 | 0 | 2 | 5 |


脱扣特性

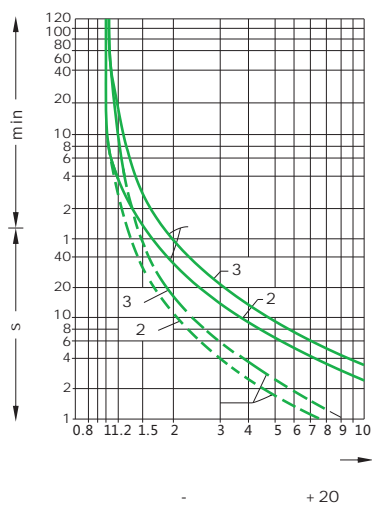



： 正面示意图





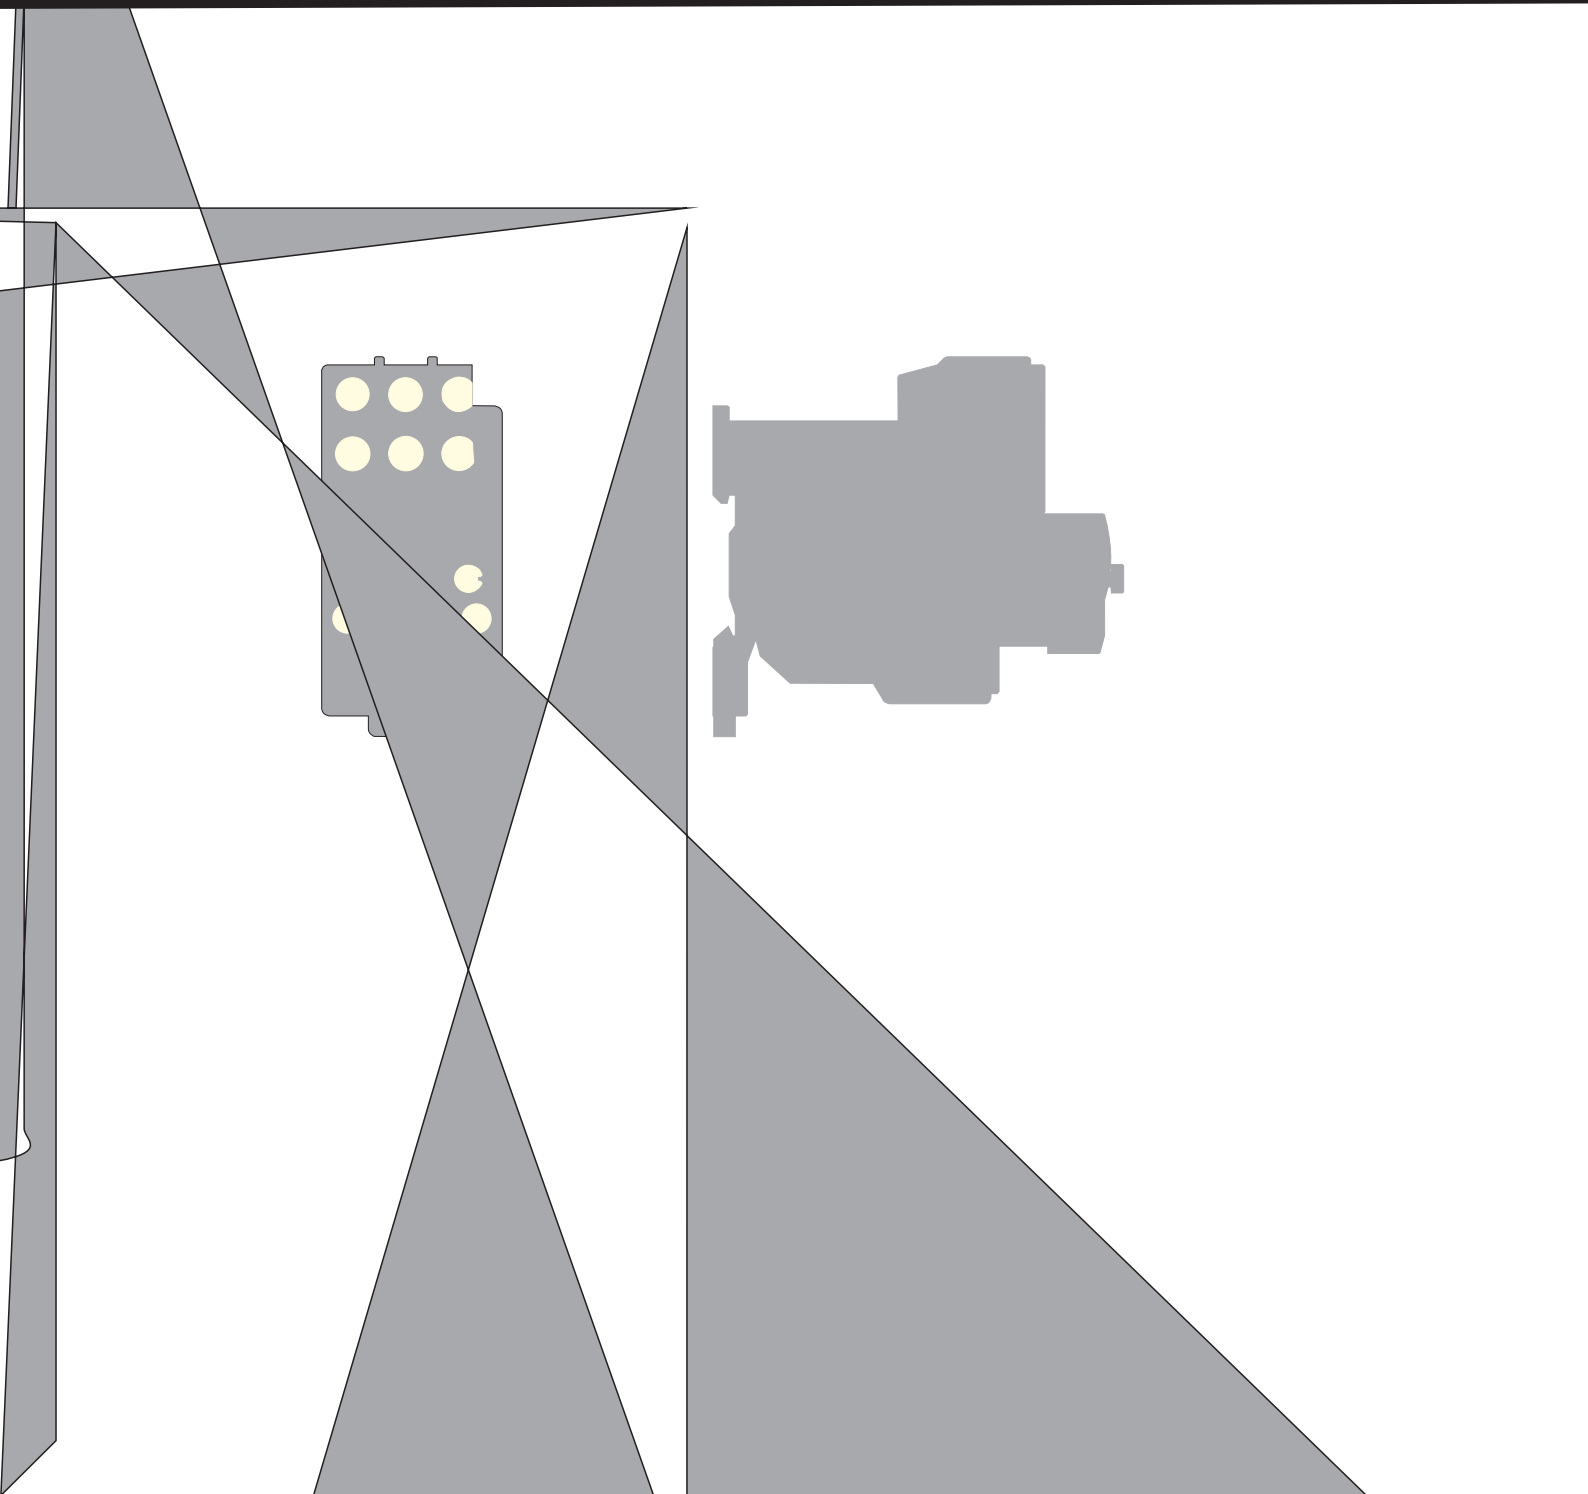

NXR 系列热过载继电器

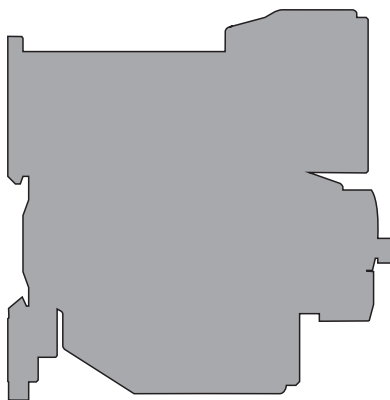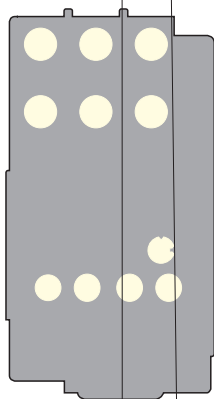

R2.25

