



TC系列

1 适用范围

TC适用于交流0.726KV以下、额定电压至0.00V、额定电流至0.00的电路中，作为导线之间的连接之用。本系列产品采用螺钉压接连接，导线端头需压接接线鼻后才能与端子连接。采用螺钉安装。


符合标准：GB/T 14048.7、IEC 60947-7-1。



2 外形及安装尺寸



序号	产品型号	额定电流	组数	外形尺寸(单位:mm)							接线螺丝
				L	L1	D	E	F	G		
1	TC-6003	600A	3	114.5	28.5	43	38	5.2	9.6	M6	
2	TC-6004	60A	4	114.5	28.5	43	38	5.2	9.6	M6	
3	TC-1003	100A	3	103	34	55	42	5.2	9.6	M6	
4	TC-1004	100A	4	136	34	55	42	5.2	9.6	M6	
5	TC-1503	150A	3	113.5	36.5	55	40	5.2	11	M6	
6	TC-1504	150A	4	152.5	36.5	55	40	5.2	11	M6	
7	TC-2003	200A	3	132	44	72	51	7.9	11.2	M8	
8	TC-2004	200A	4	176.5	44	72	51	7.9	11.2	M8	
9	TC-3003	300A	3	165.5	55	90	58	7.9	11.2	M10	
10	TC-3004	300A	4	219.5	55	90	58	7.9	11.2	M10	
11	TC-4003	400A	3	165.5	55	90	60	7.9	11.2	M10	
12	TC-4004	400A	4	219.5	55	90	60	7.9	11.2	M10	
13	TC-6003	600A	3	206.5	68.5	100.5	80	8.5	11.2	M12	
14	TC-6004	600A	4	275.5	68.5	100.5	80	8.5	11.2	M12	

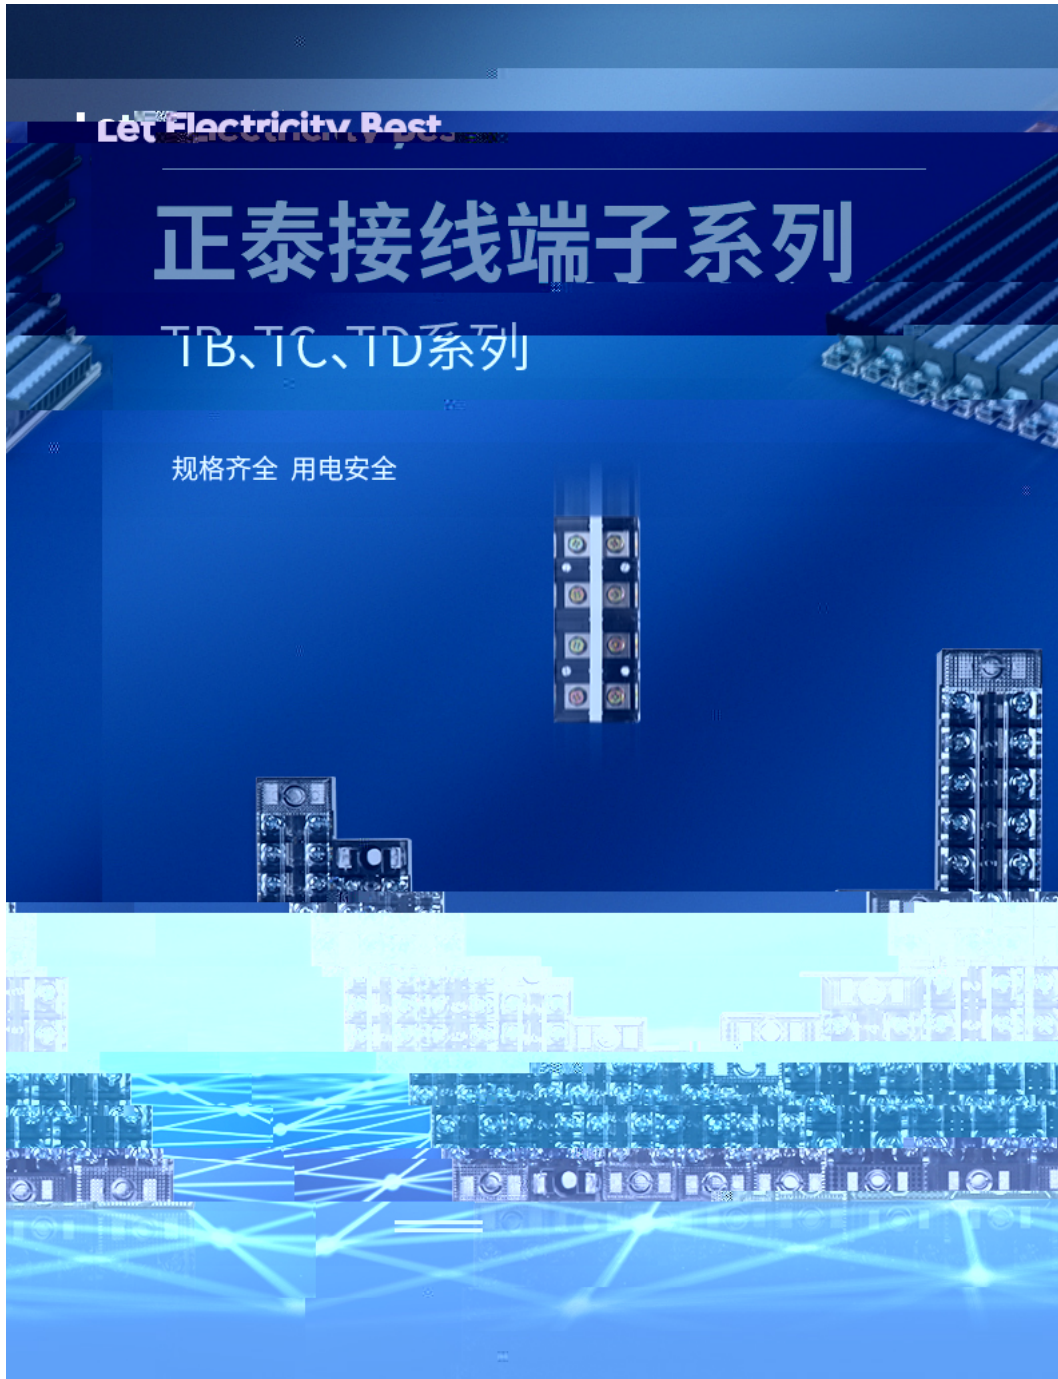

Derived from manual
measurements or instructions


产品尺寸

由人工测量或说明所得

收到产品尺寸略有出入，
请以实物为准

TB系列尺寸

单位:mm

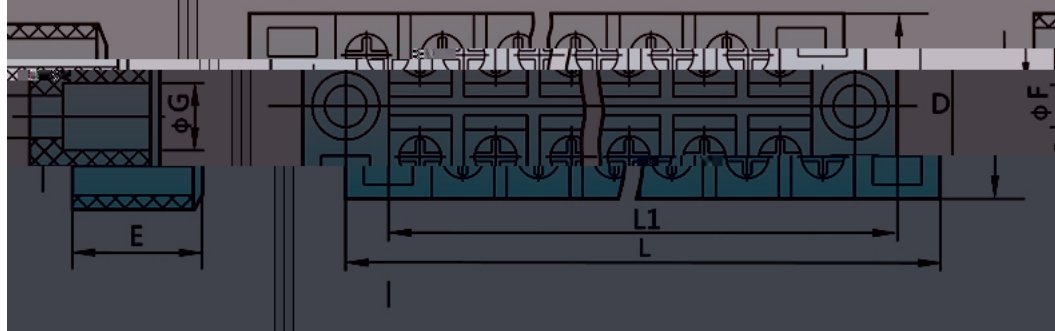


产品 型号	额定 电流	组数	外形尺寸					接线 螺丝	安装 方式
			L	L1	D	E	F		
[Redacted Content]									

TC系列尺寸

单位:mm


三组外形及安装尺寸

TC接线端子

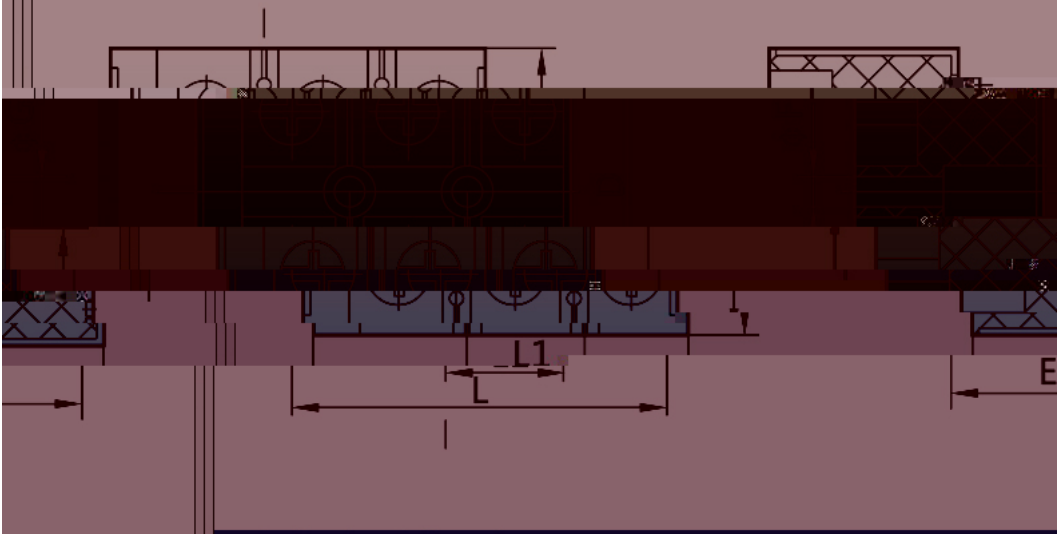

TC接线端子

四组外形及安装尺寸

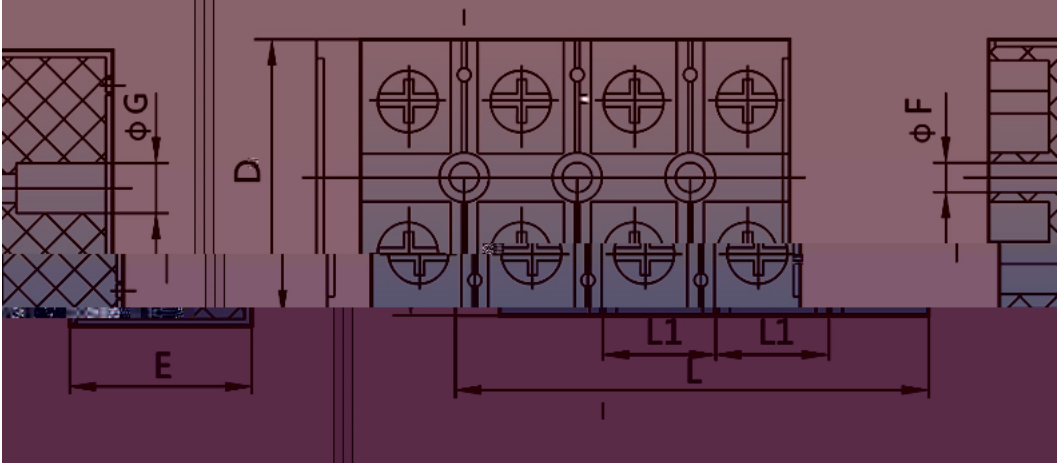



产品展示

Please
Photographs of products

