




PX Y

PX Y

: POM OBT,
0-10kgf/cm²
-20-70°C
PU


- 1.
- 2.
- 3.

PX Y



RCCN 自成PX外螺纹Y型三通管接头

RoHS



型号 Item No.	接管孔径ØD	连接螺纹 R	包装/PCS
PX4-M5	4	M5x0.8	100
PX4-01	4	PT1/8	100
PX4-02	4	PT1/4	100
PX4-04	4	PT1/2	100
PX6-M5	6	M5x0.8	100

PX6-01	6	PT1/8	100
PX6-02	6	PT1/4	100
PX6-03	6	PT3/8	100
PX6-04	6	PT1/2	100
PX8-01	8	PT1/8	100
PX8-02	8	PT1/4	100
PX8-03	8	PT3/8	100
PX8-04	8	PT1/2	100
PX10-01	10	PT1/8	50
PX10-02	10	PT1/4	50
PX10-03	10	PT3/8	50
PX10-04	10	PT1/2	50
PX12-01	12	PT1/8	50
PX12-02	12	PT1/4	50
PX12-03	12	PT3/8	50
PX12-04	12	PT1/2	25

高效耐用 / 性能稳定

HIGH PERFORMANCE DURABILITY / PERFORMANCE STABILITY



黄铜材质

耐高压

不脱扣

密封性强

寿命长

安装便捷

不同大小，形式多样

DIFFERENT SIZES, VARIOUS FORMS

总有一款适合你



注：购买前请确认您的设备相应口径及口径。

黄铜品质坚固耐用

— 结实更耐用 —

结构先进、性能良好、经久耐用




优质黄铜
不易损耗更耐用



360°灵巧转动

— 安装更方便 —

简单灵巧，即使安装后，塑管也可 360°转动

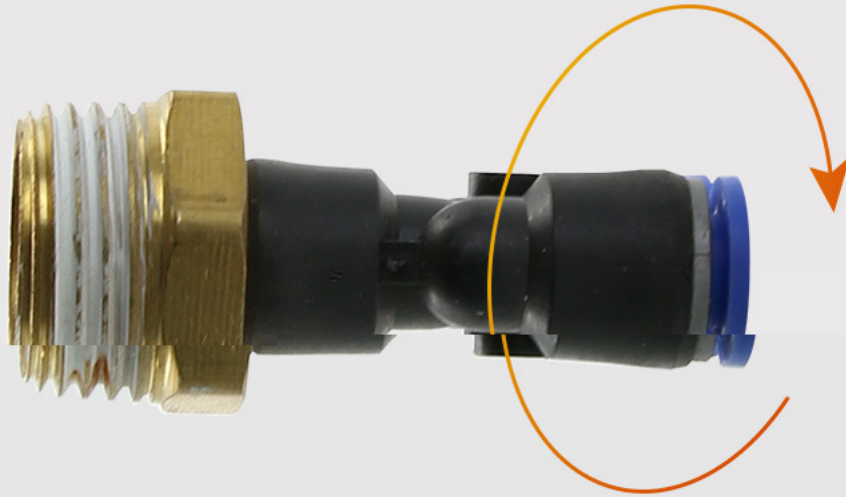

椭圆型释放环

— 密封性更好 —

维管螺纹预涂聚四氟乙烯防漏胶，密封性能好

